

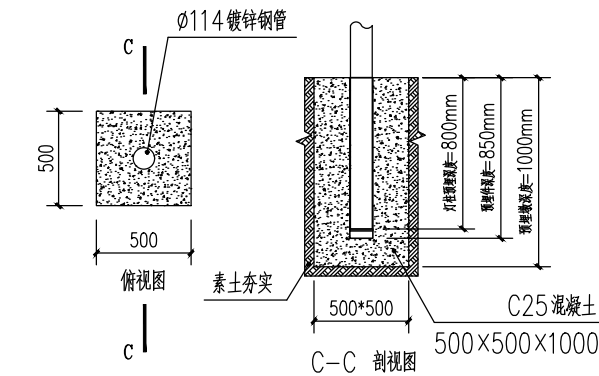


Figure 1 consists of two views of the test specimen. View (a) is the top view, showing a square specimen with a side length of 500mm and a central hole with a diameter of 76mm. View (b) is the front view, showing the specimen's height of 600mm, with a 40mm top layer and a 50mm bottom layer, and a central hole with a diameter of 76mm. The specimen is made of C25 concrete and is supported by a 500x500x600mm base.


5	4m 立柱基础大样	详图
	Scale: 1: 40	Detail



6	灯柱基础大样图	详图
	Scale: 1: 40	Detail

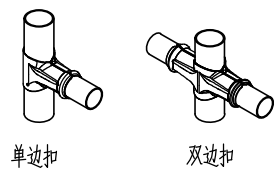

7	围网连接扣件	详图
	Scale: 1:60	Detail

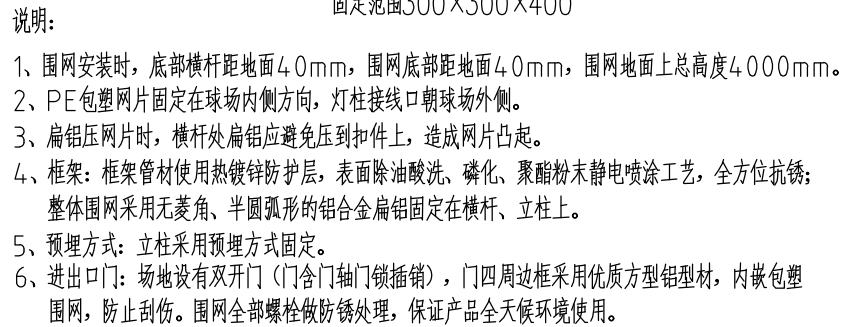

4	篮球场围网标准段	详图
	Scale: 1: 10	Detail

注：专业厂家二次深化及施工安装

7、扣件连接方式：使用精钢冲压扣件作为钢管之间相互连接，扣件使用扇形高弧度包边设计，扣件表面采用高强度加型及一体成型设计。

8、包塑围网：采用优质低碳镀锌铁丝；包塑围网采用高密度原料HDPE为基料，添加防老化母粒、抗紫外线母粒、色母粒等各种助剂，表面光滑细腻，耐腐蚀、耐高温。

9、围网产品质量及性能要求：PE包塑围网符合GB/T 16422.2-2022标准要求，通过氙灯老化试验1080小时，检测样品颜色变化等级≤1级，粉化等级≤1级，开裂等级≤0级，起泡等级≤0级，生锈钢等级≤0级，剥落等级≤0级。

材质: 低碳钢丝勾编成网状(墨绿色静电喷塑)
镀锌钢管(墨绿色静电喷塑)

图纸盖章后有效